




Applicative characteristics

- The PC67 displacement transducer was developed to guarantee a high protection level (IP67) in applications under harsh conditions and outdoors, where it may be necessary to work in the presence of dust, dirt, or liquids (not in prolonged immersion).
- The robust structure of the PC series has been improved thanks to a sealing system (patent pending) that makes it extremely reliable.
- Ideal for mobile hydraulic applications, on agricultural machines, earth-moving equipment and utility vehicles.

TECHNICAL DATA

Useful electrical stroke (C.E.U.)	from 50 mm to 1000 mm (for intermediate strokes see table "Electrical / Mechanical Data")
Independent linearity (within C.E.U.)	± 0.05%
Resolution	Infinite
Repeatability	0.01 mm
Electrical connection	4 pole M12 connector
Protection	IP67 (use M12 4-pin female connector with IP67 protection level or higher)
Life (NOT for prolonged immersion)	> 25x10 ⁶ m strokes, or > 100x10 ⁶ maneuvers, whichever is less (within C.E.U.)
Displacement speed	Standard ≤ 3 m/s max ≤ 5 m/s
Displacement force	≤ 30N (breakaway force ≤ 35N)
Vibrations	5...2000Hz, Amax = 0.75 mm amax. = 20 g
Shock	50 g, 11ms.
Tolerance on resistance	± 20%
Recommended cursor current	< 0.1 μA
Maximum cursor current	10mA
Maximum applicable voltage	60V
Electrical isolation	>100MΩ at 500V=, 1bar, 2s
Dielectric strength	< 100μA at 500V~, 50Hz, 2s, 1bar
Dissipation at 40°C (0W at 120°C)	3W
Actual Temperature Coefficient of the output voltage	≤ 5 ppm/°C typical
Working temperature	-30...+100°C
Storage temperature	-50...+120°C
Case material	Anodised aluminium
Control rod material	C45 steel, chromium plated 20 μm
Mounting method	2 selfloading and selfaligning ball-joints

MECHANICAL DIMENSIONS

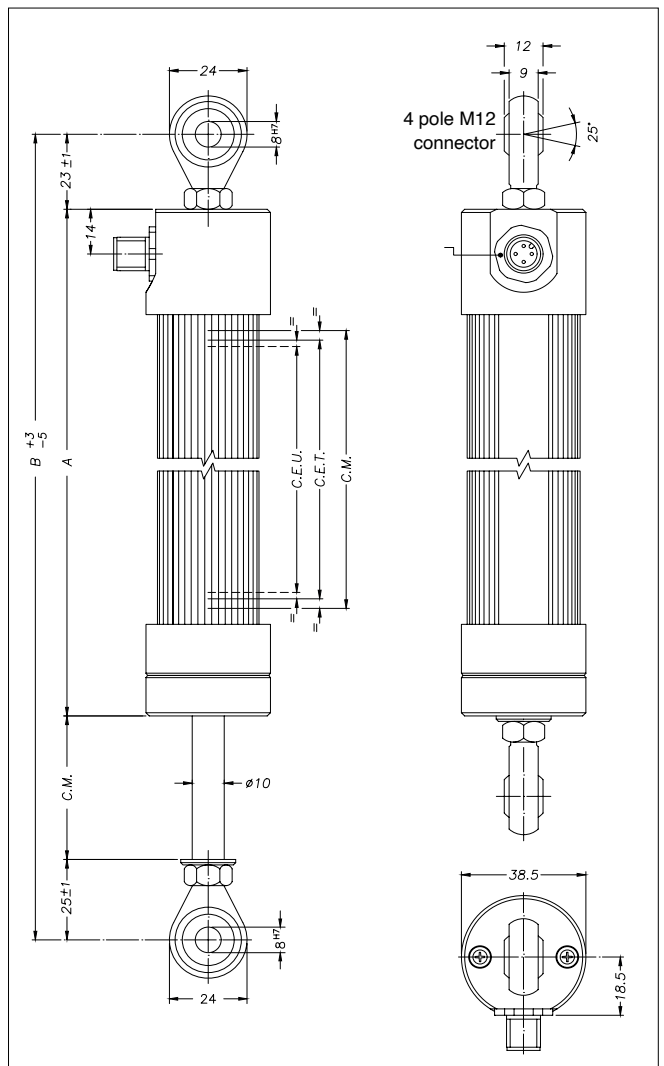

Important: all the data reported in the catalogue (linearity, lifetime, temperature coefficient) are valid for a sensor utilization as a ratiometric device with a max current across the cursor $I_c \leq 0.1 \mu A$.

MECHANICAL / ELECTRICAL DATA

MODEL		50	75	100	130	150	175	200	225	275	300	360	375	400	450	500	600	750	900*	1000*	
Useful electrical stroke (C.E.U.) +3/-0	mm	50	75	100	130	150	175	200	225	275	300	360	375	400	450	500	600	750	900	1000	
Theoretical electrical stroke (C.E.T.) ± 1	mm	C.E.U. + 3						C.E.U. + 4					365	380	406	457	508	609	762	900	1015
Resistance (C.E.T.)	k Ω	5																	10		
Mechanical stroke (C.M.)	mm	C.E.U. + 9						C.E.U. + 10					386	412	463	518	619	772	924	1025	
Case length (A)	mm	C.E.U. + 148						C.E.U. + 149					515	531	557	608	683	784	937	1089	1190
Min. distance between ball-joints	mm	C.E.U. + 196						C.E.U. + 197					563	579	605	656	731	832	985	1137	1238

* = Only for vertical installations

Note: It is recommended to keep the sliding parts lubricated, with a lubricant general purpose least every 6 months.

ELECTRICAL CONNECTIONS

INSTALLATION INSTRUCTIONS

- Respect the indicated electrical connections (DO NOT use the transducer as a variable resistance)
- When calibrating the transducer, be careful to set the stroke so that the output does not drop below 1% or rise beyond 99% of the supply voltage.

ORDER CODE

Displacement transducer **P C 6 7**

Model	
No certificate enclosed	0
Linearity curve to be enclosed	L

Example.: **PC67-0300 0000X000X00**
 Displacement transducer model PC67, 4 pole M12 connector output, useful electrical stroke (C.E.U.) 300mm.

ACCESSORIES (to order separately)

4 pole M12 female connector axial, IP67-IEC48B, wire clamp for $\varnothing 6$ - $\varnothing 8$ mm wire	CON293
4 pole M12 female connector radial 90°, IP67	CON050

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice